
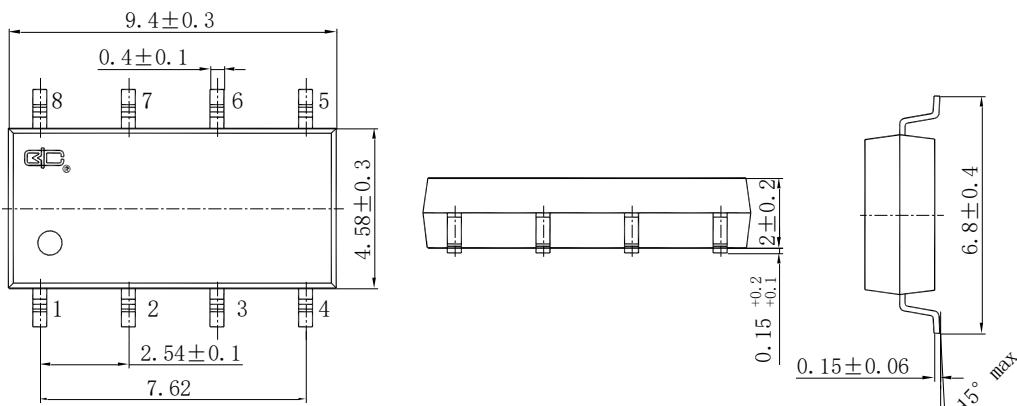
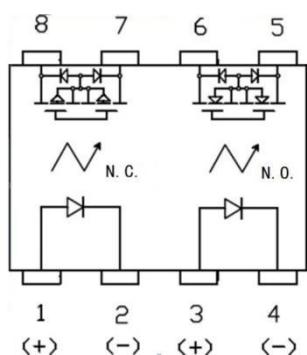


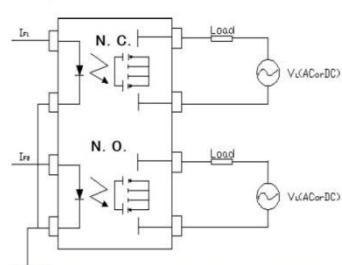

产品图片	Features 产品特性	Application 应用
 SOP8	<ul style="list-style-type: none"> <li>● Contact Form 触点形式</li> <li>● Load Voltage 输出电压</li> <li>● Load Current 输出电流</li> <li>● Low Off-State Leakage Current 漏电流</li> </ul> <p>1a/1b      60V      400mA      10μA</p>	<ul style="list-style-type: none"> <li>● Electric Vehicle 新能源电动汽车</li> <li>● Automatic Test Equipment 自动检测设备</li> <li>● Security Equipment 安全设备</li> <li>● Sensing Equipment 传感设备</li> <li>● Telephone Equipment 通信设备</li> <li>● I/O Modules I/O 模块</li> <li>● Modem 调制解调器</li> </ul>

**Type 种类**

Output rating 输出额定		Marking model 标刻型号	Part No. 订货型号
Load voltage 负载电压	Load current 负载电流		
60V	0.4A	BCW612S	BCW612S

**Dimensions 外形尺寸****Terminal Identification 引脚标识****Wiring Diagram 接线图**

通讯地址：陕西省西安市国家民用航天产业基地航天中路385号众创广场11层1101、1102、1104室

生产地址：陕西省宝鸡市陈仓区群力路1号邮政编码：721300

电话：(0917)-6293969 (0917)-6293785

传真：(0917)-6293969



## Technical parameters 技术参数 (Ambient Temperature 25°C)

I/O Absolute Maximum Ratings 输入输出电气参数最大值

Item 项目		Symbol 符号	Value 数值
Operating Temperature 工作温度		T <sub>OPR</sub>	-40°C~+85°C
Storage Temperature 储存温度		T <sub>STG</sub>	-40°C~100°C
Input 输入	Continuous LED Current 工作电流	I <sub>F</sub>	50mA
	Peak LED Current LED 峰值电流 (f=100Hz, Duty=1%)	I <sub>FP</sub>	1000mA
	LED Reverse Voltage 反向电压	V <sub>R</sub>	5V
	Input Power Dissipation 输入功耗	P <sub>IN</sub>	75mW
Output 输出	Load Voltage 输出电压	V <sub>L</sub>	60V (AC peak or DC)
	Load Current 输出电流	I <sub>L</sub>	400mA
	Peak Load Current 峰值输出电流 ((1ms, 1 shot))	I <sub>PEAK</sub>	1A
	Output Power Dissipation 输出功耗	P <sub>OUT</sub>	450mW
Total Power Dissipation 总功耗		P <sub>T</sub>	500mW
I/O Breakdown Voltage 输入输出间隔离电压 (RH=60%, 1min)		V <sub>I/O</sub>	1500Vrms

## Electrical Specifications 输入输出电气参数

Item 项目		Symbol 符号	MIN. 最小值	TYP. 典型值	MAX. 最大值	Units 单位	Conditions 条件
Input 输入	LED Forward Voltage 正向电压	V <sub>F</sub>		1.2	1.4	V	I <sub>F</sub> =10mA
	Operation LED Current 接通电流	I <sub>F ON</sub>		0.5	3.0	mA	
	Recovery LED Voltage 关断电压	V <sub>FOFF</sub>	0.5			V	
Output 输出	On-Resistance 导通电阻	R <sub>ON</sub>		1 (N.O.)	1.4 (N.O.)	Ω	I <sub>F</sub> =5mA (N.O.) , I <sub>F</sub> =0mA (N.C.) , I <sub>L</sub> =100mA, within 1sec.
				1 (N.C.)	3.0 (N.C.)		
Time parameters 时间参数	Off-State Leakage Current 漏电流	I <sub>LEAK</sub>			10	μA	I <sub>F</sub> =0mA (N.O.) , I <sub>F</sub> =5mA (N.C.) , V <sub>L</sub> =Rating
	Output Capacitance 输出端容量	C <sub>OUT</sub>		165		pF	I <sub>F</sub> =5mA, V <sub>L</sub> =0V, f=1MHz
I/O 输入输出	Turn-On Time 接通时间	T <sub>ON</sub>		0.23 (N.O.) 0.02 (N.C.)	0.5 (N.O.) 1.0 (N.C.)	ms	I <sub>F</sub> =5mA
	Turn-Off Time 关断时间	T <sub>OFF</sub>		0.03 (N.O.) 0.5 (N.C.)	0.2 (N.O.) 3.0 (N.C.)	ms	I <sub>L</sub> =50mA
I/O 输入输出	I/O Insulation Resistance 绝缘电阻	R <sub>I/O</sub>	10 <sup>10</sup>			Ω	DC=500V
	I/O Capacitance 隔离电容	C <sub>I/O</sub>		0.8		pF	f=1MHz

通讯地址：陕西省西安市国家民用航天产业基地航天中路385号众创广场11层1101、1102、1104室

生产地址：陕西省宝鸡市陈仓区群力路1号邮政编码：721300













电话：(0917)-6293969 (0917)-6293785

传真：(0917)-6293969



# PhotoMOS 光 MOS 继电器 (SOP8)

## Reference Data 参考数值 (BCW612S)

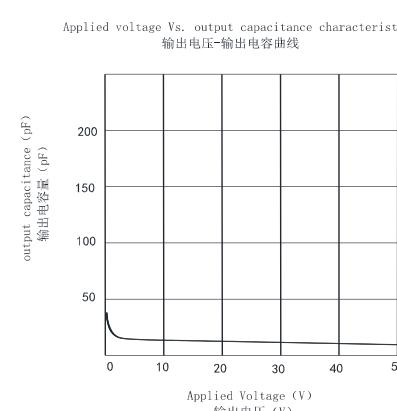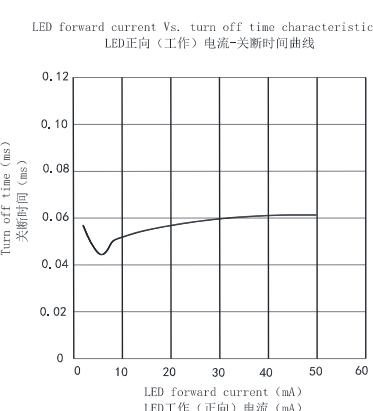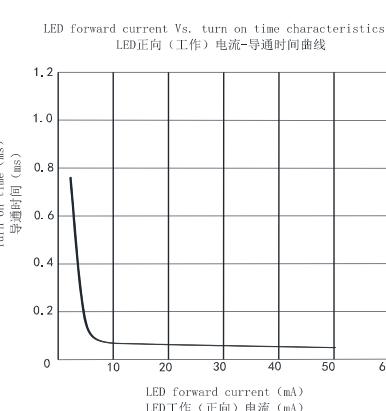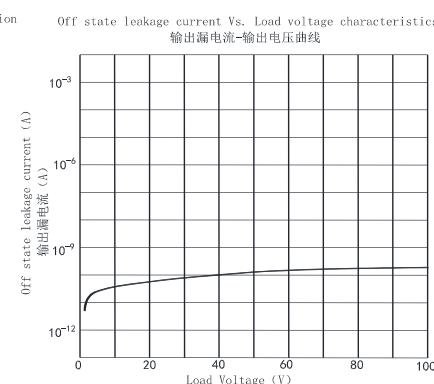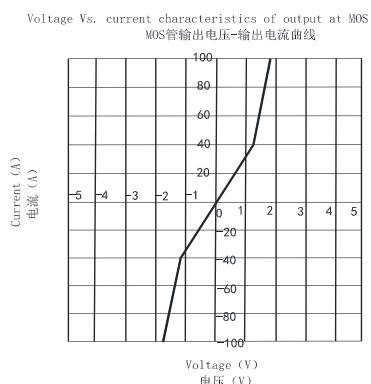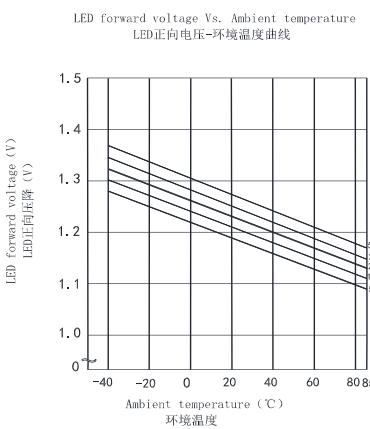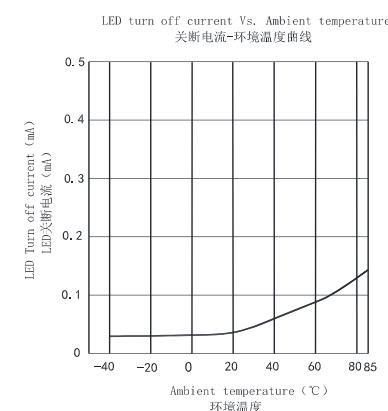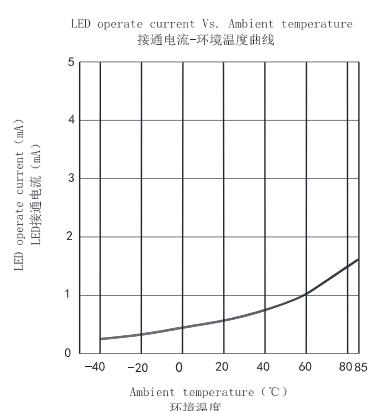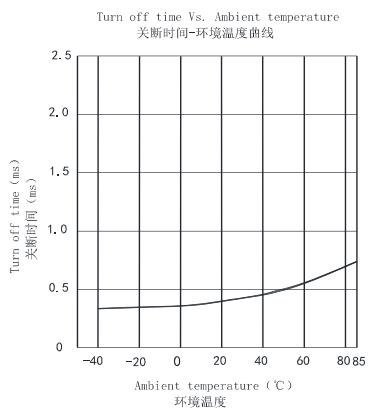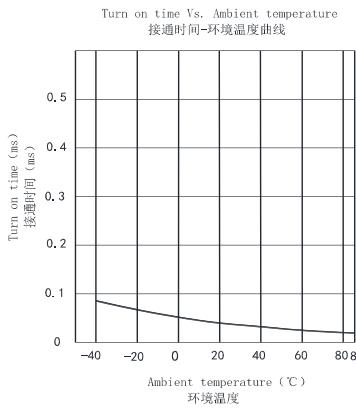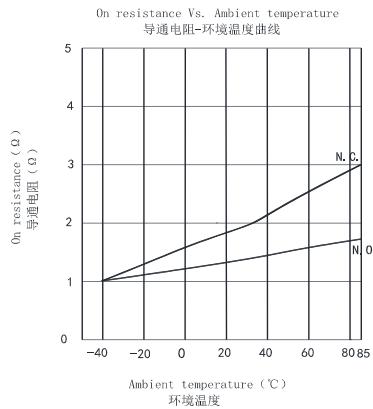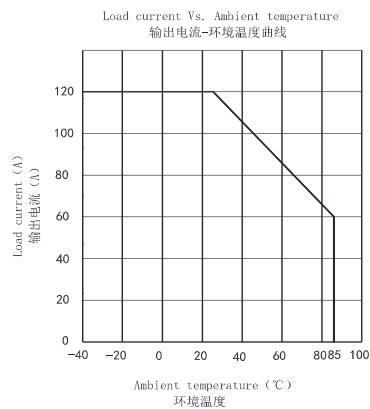

通讯地址：陕西省西安市国家民用航天产业基地航天中路385号众创广场11层1101、1102、1104室

生产地址：陕西省宝鸡市陈仓区群力路1号邮政编码：721300

电话：(0917)-6293969 (0917)-6293785

传真：(0917)-6293969